

Chaotic vibrations in a regenerative cutting process

Grzegorz Litak

*Department of Applied Mechanics, Technical University of Lublin,
Nadbystrzycka 36, PL-20-618 Lublin, Poland*

Abstract

We have analyzed vibrations generated in an orthogonal cutting process. Using a simple one degree of freedom model of the regenerative cutting we have observed the complex behaviour of the system. In presence of a shaped cutting surface, the nonlinear interaction between the tool and a workpiece leads to chatter vibrations of periodic, quasi-periodic or chaotic type depending on system parameters. To describe the profile of the surface machined by the first pass we used a harmonic function. We analyzed the impact phenomenon between the tool and a workpiece after their contact loss.

Key words: chaotic vibrations, cutting process, chatter, intermittency

1 Introduction

The stability of a cutting process influences directly the quality of a final surface. The control of process in various working conditions is an important problem for machining technology. Instabilities of process usually manifest as harmful chatter vibrations generated during the cutting. Recently many papers tackled that problem focusing on the conditions of appearing such vibrations. Apart from regular (periodic or quasi periodic) vibrations, possibilities of chaotic ones were also investigated theoretically [1–10] as well as experimentally [5,11,12]. The aim of this paper is to explore the mechanism of the chatter vibration generation using a simple model of a cutting process with one degree of freedom. In the paper we will clarify the role of impacts after tool-workpiece contact loss.

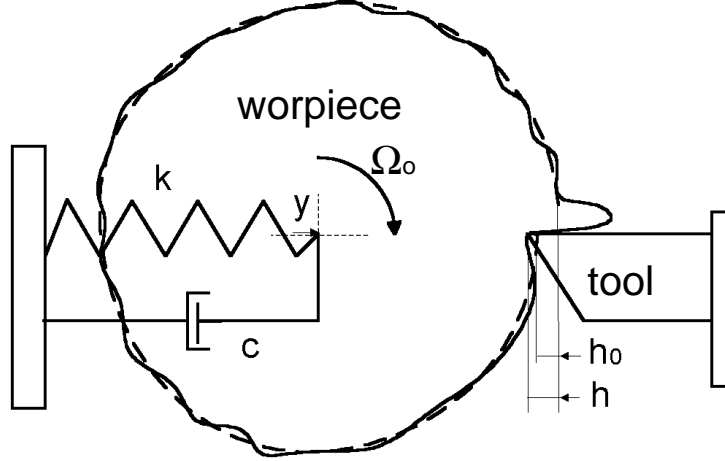


Fig. 1. The model of an orthogonal turning process. The full line illustrates the workpiece surface cut in the presence of chatter vibrations while the dashed one corresponds to the smooth surface cut in stable conditions.

2 The model of a cutting process

The one degree of freedom physical model of the orthogonal cutting process is presented in Fig. 1. Here k denotes the effective spring of a workpiece, c is the damping coefficient, h_0 is the assumed cutting depth while h the actual one, Ω_0 is a rotational velocity and v_0 is a relative velocity between the tool and the workpiece tangent to the workpiece surface ($v_0 = \Omega_0 r$, where r is a radius of the workpiece). The horizontal displacement of the workpiece symmetry axis at the time t is denoted by y . After the first pass of tool the actual cutting depth $h(t)$ can be expressed as

$$h(t) = h_0 - y(t) + y(t - T), \quad (1)$$

where the $y(t - T)$ corresponds to the position of the workpiece of during the previous pass, T is the period of revolution. In our approach, assuming constant relative velocity $v_0 = \text{const.}$, the actual cutting of depth $h(t)$ will be determined by the the dynamics of the model [10]:

$$\ddot{h} + 2n\dot{h} + p^2h = -\frac{1}{m}\text{sgn}(v_0 + \dot{h})F_y(h), \quad (2)$$

where p is a frequency of free vibrations and $2n = c/m$ is a dimensionless damping coefficient. Finally F_y is the thrust force, a horizontal component of a nonlinear cutting force, m is the effective mass of a workpiece. The above equation (Eq. 2) can be written in terms of current position $y(t)$ (Eq. 1) corresponding to the actual position of the workpiece as

$$\ddot{y}(t) + 2n\dot{y}(t) + p^2y(t) = \frac{1}{m} (\text{sgn}(v_0 - \dot{y}(t))F_y(h) - \text{sgn}(v_0 - \dot{y}(t))F_y(h_0)). \quad (3)$$

The thrust force F_y is mainly based on a dry friction part (between the tool and a chip) with power law dependence on the actual cutting depth h [10]:

$$F_y(h) = \Theta(h)Kw(h)^{3/4}, \quad (4)$$

where K denotes the cutting resistance, w is a chip width and Θ is the Heaviside step function. To go further in our analysis we have assumed, in the first approximation, that $y(t - T)$ can be described by a periodic function

$$y(t - T) = a \cos(\omega t - \phi) = a \cos\left(\frac{\omega x}{v_0} - \phi\right), \quad (5)$$

where ω , a and ϕ are the period, amplitude and phase of a surface shape modulation, respectively. $x(t)$ denotes the relative distance passed by the tool on the cylindrical surface of a rotating workpiece. Note that our model (Fig. 1) includes also the contact loss between the tool and a workpiece. Such phenomenon can be particularly important during the cutting process with a high speed. Here we assume the restitution parameter $\beta \leq 1$ connected with the impact after contact loss.

$$\dot{y}(t^+) = -\beta \dot{y}(t^-), \quad (6)$$

where t^+ and t^- denotes time before and after impacts, respectively. The above assumptions (Eqs. 5,6) will be crucial in our investigations in the next section where we discuss the results of simulations.

3 Numerical simulations

Equation 2 has been solved numerically for the realistic system parameters [5,6,9]: $K = 1.25 \times 10^9 \text{ N/m}^2$, $w = 3.0 \times 10^{-3} \text{ m}$, $h_0 = 0.3 \times 10^{-3} \text{ m}$, $p = 816 \text{ rad/s}$, $m = 17.2 \text{ kg}$, $a = 0.2 \times 10^{-3} \text{ m}$, $\phi = \pi/2$, $\beta = 0.75$ and a relatively small damping $n = 4.3 \text{ s}^{-1}$. In Figs. 2a-d we show time histories of cutting depth $h(t)$ for various frequency. The negative value of h means that the tool lost a contact with the workpiece. Fig. 2a presents the results for cutting with 'parametric excitation' (Eq. 5) $\omega = 800 \text{ rad/s}$. Note that, this case corresponds to a relatively small velocity v_0 (but still $v_0 > \dot{y}$). One can see that the cutting process is very smooth with small fluctuations around assumed h_0 . In contrary

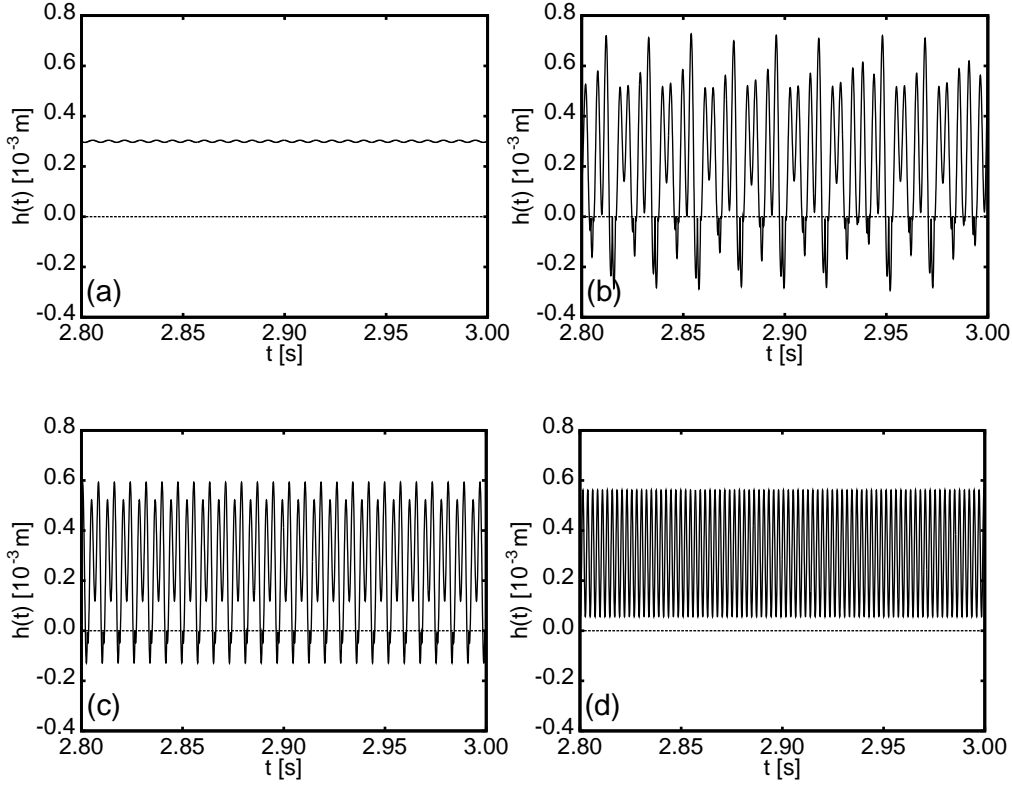


Fig. 2. Time histories of workpiece motion $y(t)$ for various frequency ω : (a) $\omega = 800$ rad/s, (b) $\omega = 1200$ rad/s, (c) $\omega = 1600$ rad/s, (d) $\omega = 2600$ rad/s

to that Fig. 2b (for a larger frequency $\omega = 1200$ rad/s) shows unstable cutting with large fluctuation of a cutting depth h . The time history $h(t)$ manifests the contact loss phenomenon. Moreover, vibrations generated in the system look aperiodic. It could be caused by the lack of synchronisation between impacts incidents and the driving frequency ω . Thus the aperiodic part is appearing after the escape of tool into the region of negative $h < 0$ (Fig. 2b). On the other hand the same system but $h > 0$ seems to be more regular. Such behaviour is the benchmark of an intermittent mechanism of chaotic motion [13]. Surely, as in other mechanical examples [14] appears due to impacts. Increasing the ω ($\omega = 1600$ rad/s in Fig. 2c) we transit back to regular vibrations of cutting depth $h(t)$. Here, in spite of a large amplitude and a tool-workpiece contact losses the impacts are synchronised with a 'parametric forcing' ω . Finally, for a relatively large ω ($\omega = 2600$ rad/s in Fig. 2c) which corresponds to cutting with a high speed v_0 , the vibration amplitude slightly decreases.

To explore the vibrations of the system we have done the Fourier transform for each of above cases. Figs. 3a–d present the amplitude of workpiece vibrations $y(t)$ versus frequency ω' with the system parameters as in Fig. 2. Figs.

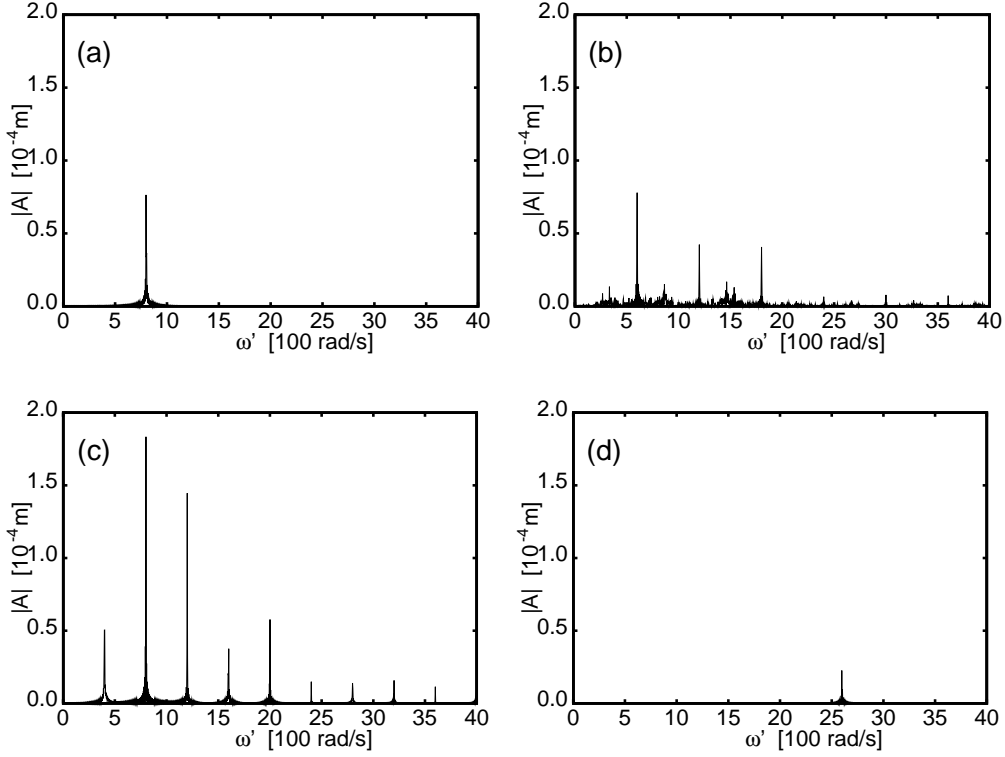


Fig. 3. The amplitude of workpiece vibrations y versus frequency ω' , The system parameters have been chosen as in Fig. 2.

3a and 3d show spectra with a single frequency corresponding to driving one ω indicating on synchronized motion of a workpiece. Fig. 3b has a combined spectrum of singular frequencies and continues interval of ω' . This is a typical output of chaotic systems. In Fig. 3c one can find a lot of characteristic frequencies ω' which are represented by natural magnification of $\omega/4$ ($4\omega'/\omega = l$, where l is a natural number).

Interestingly, for a small driving frequency $\omega = 800$ rad/s, which corresponds to a small rotational velocity of a workpiece, fluctuations of cutting depth h are small Fig. 2a. Physically, in this case, the workpiece in its motion y can follow the driving 'parametric forcing' by the initial shape modulation $y(t-T)$. This is resulting in relatively large vibration amplitude of the workpiece (Fig. 3a). For a large driving frequency $\omega = 2600$ rad/s we obtain the opposite situation. Now fluctuations of h have larger amplitude (Fig. 2d) while vibrations y smaller one (Fig. 3d). In this case a workpiece, due to its large inertia, can not follow the changes of the initial shape forcing the large variations of h via Eq. 1.

4 Summary and conclusions

We have considered vibrations of a tool-workpiece system in a orthogonal turning process. The simple one degree of freedom model we used includes the basic phenomena as friction between a chip and the tool, nonlinear - power law character of the cutting force expression as well as the possibility of a contact loss between the tool and the workpiece. In our model we observe the complex behaviour of the system. In presence of a shaped initially cut surface, the nonlinear interaction between the tool and a workpiece leads to chatter vibrations of a periodic, quasi-periodic or chaotic type. The main role in chaotic motion is played by impacts generated after the a tool-workpiece contact losses. Clearly, they enable an intermittent transition from a regular to chaotic system behaviour. In spite of the fact that our results are obtained by very simple model we believe that we found the important mechanism of cutting instabilities by an impact phenomenon.

Acknowledgements

The work has been partially supported by Polish State Committee for Scientific Research (KBN) under the grant No. 126/E-361/SPUB/COST/T-7/DZ 42/99.

References

- [1] D. W. Wu, C. R. Liu. An Analytical Model of Cutting Dynamics. Part 2: Verification, *ASME Journal of Engineering for Industry* **107**, 112–118 (1985).
- [2] I. Grabec. Chaos Generated by the Cutting Process, *Phys. Lett. A* **117**, 384–386 (1986).
- [3] I. Grabec, Chaotic Dynamics of the Cutting Proces, *J. Mach. Tools Manufact.* **28**, 19–32 (1988).
- [4] J. Gradisek, E. Govekar, I. Grabec. A Chaotic Cutting Process and Determining Optimal Cutting Parameter Using Neural Networks. *Int. J. Mach. Tools Manufact.* **36**, 1161–1172 (1996).
- [5] E. Marui, S. Kato, M. Harashimoto, T. Yamada. The Mechanism of Chatter Vibrations in a Spindle-Workpiece System: Part 2 - Characteristics of Dynamic Cutting Force and Vibration Energy, *ASME Journal of Engineering for Industry* **110**, 242–247 (1988).

- [6] G. Litak, J. Warmiński, J. Lipski. Self-Excited Vibrations in Cutting Process. *Proceedings of 4th Conference on Dynamical Systems - Theory and Applications Łódź 8-9 December 1997*, Eds J. Awrejcewicz, J. Grabski and J. Mrozowski, 193–197 Łódź (1997).
- [7] M. Wiercigroch. Chaotic Vibrations of a Simple Model of the Machine Tool - Cutting System. *ASME Journal of Vibration and Acoustics* **119**, 468-475 (1997).
- [8] M. Wiercigroch, A. H-D. Cheng. Chaotic and Stochastic Dynamics of Orthogonal Metal Cutting, *Chaos, Solitons & Fractals* **8**, 715–726 (1997).
- [9] J. Warmiński, G. Litak, J. Lipski, M. Wiercigroch, M.P. Cartmell. Vibrations in Regenerativ Cutting Process Synthesis of Nonlinear Dynamical Systems. *Solid Mechanics and its applications* Vol. **73**, 275–283 Eds. E. Lavendelis and M. Zakrzhevsky, Kluwer Academic Publisher, Dordecht (2000).
- [10] G. Stepan, T. Kalmar-Nagi. Nonlinear Regenerative Machine Tool Vibrations. *Proceedings of 16th ASME Biennial Conference on Mechanical Vibrations and Noise, ASME Design and Technical Conferences, September 14-17, 1997, Sacramento, California*, 1–11. Sacramento (1997).
- [11] I.N. Tansel, C. Erkal, T. Keramidas. The Chaotic Characteristic of Three Dimensional Cutting, *Int. J. Mach. Tools Manufact* **32**, 811–827 (1992).
- [12] J.R. Pratt and A. H. Nayfeh. Design and Modeling for Chatter Control. *Nonlinear Dynamics* **19**, 49–69 (1999).
- [13] Y. Pomeau, P. Manneville. Intermittent Transition to Turbulence in Dissipative Dynamical Systems, *Cmommun. Math. Phys.* **74**, 189 (1980).
- [14] S. Chatterjee and A. K. Malik. Three Kinds of Intermitency in a Nonlinear Mechanical System, *Phys. Rev.* **E 53**, 4362–4367 (1996).